

<b>TECHNICAL DATA SHEET</b>	code	<b>7785ECH</b>
	version	<b>1</b>
	date	<b>2011-01-06</b>
	page	<b>1/2</b>


**APPLICATION**

Triaxial camera cable used to interconnect video cameras to related equipment.


**DESCRIPTION**

Triaxial camera cable: 14.5 mm triax with stranded center conductor and FRNC jacket.

**CONSTRUCTION**

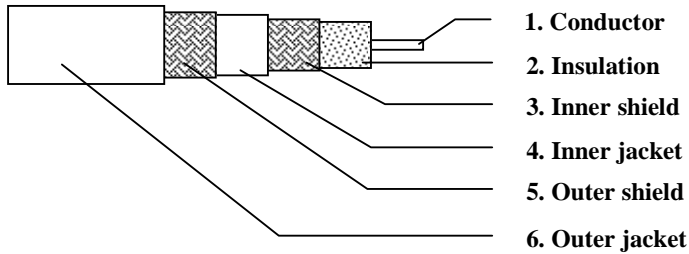

<b>1. Conductor</b>	
Material	Stranded, bare copper
Diameter	2.2 mm (7x0.75 mm)
<b>2. Insulation</b>	
Material	Foam polyethylene
Diameter over insulation	9.7 ± 0.2 mm
<b>3. Inner shield</b>	
Material	Bare copper braid
Minimum coverage	80%
Diameter over braid	10.4 mm nominal
<b>4. Inner jacket</b>	
Material	FRNC
Diameter over jacket	11.9 ± 0.2 mm
<b>5. Outer shield</b>	
Material	Bare copper braid
Minimum coverage	80%
Diameter over braid	12.6 mm nominal
<b>6. Outer jacket</b>	
Material	FRNC
Diameter over jacket	14.5 ± 0.2 mm

	<b>TECHNICAL DATA SHEET</b>	code	<b>7785ECH</b>
		version	<b>1</b>
		date	<b>2011-01-06</b>
	<b>Triax 14 Camera Cable FRNC</b>	page	<b>2/2</b>

## REQUIREMENTS AND TEST METHODS

### Electrical:

Nominal impedance	75 Ohms
Nominal capacitance conductor to shield @ 1 kHz	55 pF/m
Nominal velocity of propagation	81%
Nominal conductor DC resistance @ 20°C	5.7 Ohm/km
Nominal shield DC resistance @ 20°C: Inner shield	6.4 Ohm/km
Outer shield	4.1 Ohm/km
Minimum structural return loss @ 5-850MHz	21 dB
Screening attenuation @ 30 to 850 MHz	75 dB
Nominal attenuation @ 1 MHz	0.4 dB/100m
10 MHz	1.3 dB/100m
20 MHz	1.7 dB/100m
40 MHz	2.5 dB/100m
50 MHz	2.8 dB/100m
60 MHz	3.1 dB/100m
100 MHz	4.2 dB/100m
270 MHz	7.0 dB/100m
300 MHz	7.6 dB/100m
540 MHz	10.1 dB/100m
1000 MHz	14.3 dB/100m

### Mechanical and physical:

Temperature rating (installation)	-5 to +70 °C
Temperature rating (operating/storage)	-30 to +70 °C
Resistance to flame propagation:	To meet International Standard IEC 60332-3-24
FRNC material:	
Tensile strength:	≥ 9.0 N/mm <sup>2</sup>
Elongation at break:	≥ 125 %
Corrosivity	To meet International Standard IEC 60754-2
Smoke Density	To meet International Standard IEC 61034
LOI	>35%
Minimum bending radius (without pulling tension)	150 mm
Maximum pulling tension	550 N



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.