
	<b>TECHNICAL DATA SHEET</b>	code	<b>H1001C2</b>
		version	<b>2</b>
		date	<b>2011-07-22</b>
	<b>COAX H1001 PVC</b>	page	<b>1/2</b>

## APPLICATION

Coaxial cables used for Radio-frequency designed according the International Standard IEC 1196.

## CONSTRUCTION

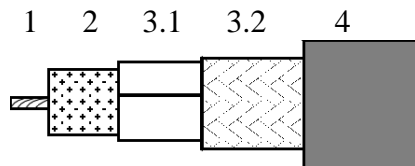


1	Inner conductor	19x0.54 stranded soft annealed copper
2	Dielectric	Gas injected PE
3.1	Foil	CuPet
3.2	Braid	Annealed copper
4	Sheath	PVC according the European Standard HD 624.

## REQUIREMENTS AND TEST METHODS

Test methods in accordance with International Standard IEC 1196.

### Mechanical characteristics

1. Inner conductor:	
Diameter:	2.7 mm ± 0.05 mm
2. Dielectric:	
Diameter:	7.15 mm ± 0.2 mm
Centricity:	≥ 0.85
3. Outer conductor:	
Diameter screen:	7.9 mm ± 0.25 mm
Foil overlap:	≥ 2 mm
Coverage braid:	49 % ± 5 %
4. Sheath:	
Diameter:	10.3 mm ± 0.3 mm
Tensile strength:	≥ 10 N/mm <sup>2</sup>
Elongation at break:	≥ 300 %
5. Cable:	
Crush resistance of cable:	< 1% (load of 700N)
Storage/operating temperature:	-25°C to +70°C
Minimum installation temperature:	-5 °C
Minimum static bend radius:	100 mm
Total weight:	127 g/m
Burning load	1600 kJ/m

	<b>TECHNICAL DATA SHEET</b>	code	<b>H1001C2</b>
		version	<b>2</b>
		date	<b>2011-07-22</b>
	<b>COAX H1001 PVC</b>	page	<b>2/2</b>

**Electrical characteristics**

Mean characteristic impedance:	$50 \pm 2 \Omega$
Regularity of impedance:	$> 46 \text{ dB}$
DC loop resistance:	$\leq 16.5 \Omega/\text{km}$
DC resistance inner conductor:	$\leq 4.5 \Omega/\text{km}$
DC resistance outer conductor:	$\leq 12.0 \Omega/\text{km}$
Capacitance:	$80 \text{ pF/m} \pm 3 \text{ pF/m}$
Velocity ratio:	$0.83 \pm 0.02$
Insulation resistance:	$> 10^4 \text{ M}\Omega.\text{km}$
Voltage test of dielectric:	$3 \text{ kVdc}$
Screening efficiency 30-1000 MHz:	$\geq 100 \text{ dB}$

Attenuation at	Nominal	Attenuation at	Nominal
5 MHz:	1.0 dB/100m	1000 MHz:	16.3 dB/100m
50 MHz:	3.3 dB/100m	1350 MHz:	19.3 dB/100m
100 MHz:	4.7 dB/100m	1750 MHz:	22.5 dB/100m
200 MHz:	6.7 dB/100m	2150 MHz:	25.4 dB/100m
400 MHz:	9.8 dB/100m	2400 MHz:	27.1 dB/100m
600 MHz:	12.2 dB/100m	5000 MHz:	42.4 dB/100m
800 MHz:	14.4 dB/100m	10000 MHz:	66.4 dB/100m

Maximum attenuation is 10% higher.

**REVISIONS**

#	Description	Date	Initials
2	Burning load added	20110722	RVN



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.